

10ET

PRO SERIES TANDEM AXLE EQUIPMENT TRAILER


G.V.W.R.	9,990#	AXLES	Two 5200# Cambered Axles w/ Electric Brakes
G.A.W.R. (EA. AXLE)	5,080#	SUSPENSION	Multi-Leaf Spring w/ Equalizer
COUPLER	2-5/16" Bulldog	TIRE	ST225/75-15 Load Range D
SAFETY CHAINS	1/4" Grd. 70 w/ Safety Latch Hook (2 ea.)	WHEEL	15 X 6 White Spoke 6 Bolt
JACK	2000# Top Wind (Bolted On)	FLOOR	2" Pine
TONGUE	5" Channel Fold-Back	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(none)	ELEC. PLUG	6 Way
FRAME	5" Channel	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	3" Channel	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
UPRIGHTS	(none)		
FENDERS	9" X 72" Teardrop w/ Back		

STANDARD FEATURES

- Two 5200# Axles w/ Electric Brakes
- Complete Break-A-Way System w/ Charger
- 2-5/16" Bulldog Forged Coupler
- Lower Jack Support Plate
- Spare Mount
- Safety Chains Attached w/ Cold Rolled Eyelets
- Floor Secured w/ 5/16" Torx Screws
- 2" Tubular Stop Rail
- Reflective Marker Tape
- 4' Slide In Ramps
- Tie Down Pockets - Sides, Front & Rear
- 32" Dovetail
- Chamfered Front w/Diamond Plate
- Fold Back Tongue

10ET-16

DIMENSIONS			
LENGTH	A	B	C
16'	193-1/2"	78-1/2"	115"
18'	217-1/2"	90-1/2"	127"
20'	240"	102"	138"

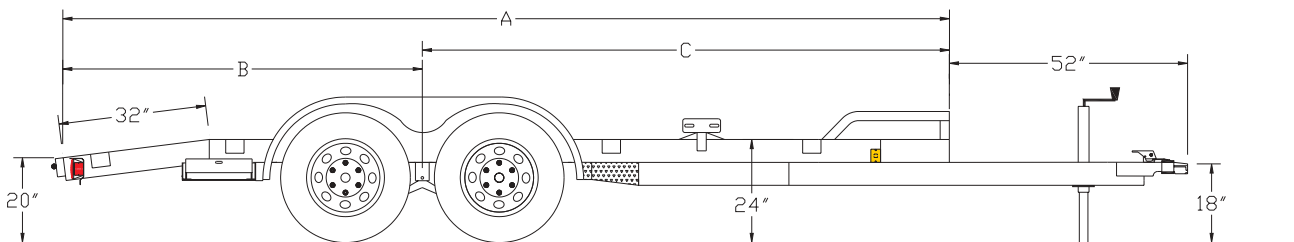

OPTIONS

NBK2	Electric Brakes On 1 Axle Only
HYD1	Hydraulic Brakes On 1 Axle w/ Adjustable Demco Actuator
HYD2	Hydraulic Brakes On 2 Axles w/ Adjustable Demco Actuator
SP	15" Spare Tire & Wheel - Load Range D
DLJ	7K Drop Leg Jack
SF	1/8" Diamond Plate Steel Floor (Per Sq. Ft.)
TU	Tire Upgrade to 16" - Load Range E
SPU	Spare Upgrade to 16" - Load Range E
AP	Adjustable Pintle In Channel

Effective January 1, 2003 (Specifications and Options subject to change without notice.)