

10FT

PRO SERIES TILT BED EQUIPMENT TRAILER


G.V.W.R.	9,990#	AXLES	Two 5200# Cambered Axles w/ Elec. Brakes
G.A.W.R. (EA. AXLE)	5,080#	SUSPENSION	Multi-Leaf Spring with Equalizer
COUPLER	2-5/16" Bulldog	TIRE	ST225/75-15 Load Range D
SAFETY CHAINS	1/4" Grd. 70 w/ Safety Latch Hook (2 ea.)	WHEEL	15 X 6 White Spoke 6-Bolt
JACK	2000# Set Back (Bolted On)	FLOOR	2" Pine
TONGUE	5" Channel Fold Back	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(none)	ELEC. PLUG	6 Way
FRAME	6" Channel	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	3" Channel + 2-7/8" Pipe	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
UPRIGHTS	(none)		
FENDERS	10 3/4" X 72" Teardrop w/ Back		

STANDARD FEATURES

- Lower Jack Support Plate
- Two 5200# Axles w/ 2 Electric Brakes
- Complete Break-A-Way System w/ Charger
- Fold Back Tongue w/ Raised Coupler
- Safety Chains Attached w/ Cold Rolled Eyelets
- Floor Secured w/ 5/16" Torx Screws
- 2-5/16" Bulldog Forged Coupler
- Reflective Marker Tape
- Spare Tire Mount
- Hydraulic Dampening System
- Unique Two Piece Main Frame
- Diamond Plate Knife Edge
- 102" Wide Overall, 80" loading width between fenders

10FT-16

LENGTH	DIMENSIONS			
	A	B	C	D
16'	202-1/2"	101-1/2"	101"	13°
18'	225-1/2"	112-1/2"	113"	12°
20'	249-1/2"	121-1/2"	128"	11°

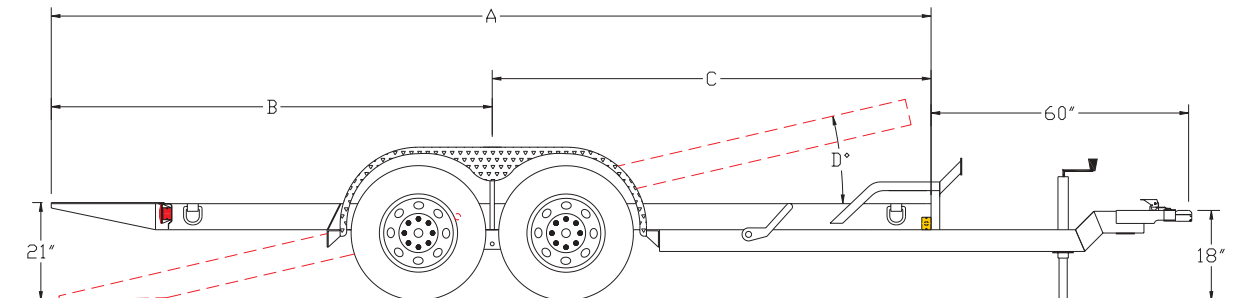

OPTIONS

NBK2	Electric Brakes On 1 Axle Only
HYD1	Hydraulic Brakes On 1 Axle w/ Adjustable Demco Actuator
HYD2	Hydraulic Brakes On 2 Axles w/ Adjustable Demco Actuator
SP	15" Spare Tire & Wheel - Load Range D
TU	16" Tire Upgrade - Load Range E
SPU	Spare Tire Upgrade to 16" - Load Range E
SF	1/8" Diamond Plate Steel Floor (Per Sq. Ft.)
DLJ	7K Drop Leg Jack
DF	14 Gauge Diamond Plate Fenders & Backs
AP	Adjustable Pintle In Channel

Effective January 1, 2003 (Specifications and Options subject to change without notice.)