

# 100A

## TANDEM AXLE OVER THE AXLE TRAILER


<b>G.V.W.R.</b> 9,990#	<b>AXLES</b> Two 5200# Cambered Axles w/ Elec. Brakes
<b>G.A.W.R. (EA. AXLE)</b> 5,080#	<b>SUSPENSION</b> Multi-Leaf Spring w/ Equalizer
<b>COUPLER</b> 2-5/16" Adjustable Bulldog	<b>TIRE</b> ST225/75-15 Load Range D
<b>SAFETY CHAINS</b> 1/4" Grd. 70 w/ Safety Latch Hook (2 ea.)	<b>WHEEL</b> 15 X 6 White Spoke 6 Bolt
<b>JACK</b> 7K Drop Leg Jack, Bolted On	<b>FLOOR</b> 2" Pine
<b>TONGUE</b> Integral With Frame	<b>LIGHTS</b> D.O.T. Stop, Tail, Turn and Clearance
<b>TOP RAIL</b> (none)	<b>ELEC. PLUG</b> 6 Way
<b>FRAME</b> 10" I-Beam	<b>FINISH (PREP)</b> Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
<b>CROSSMEMBERS</b> 3" x 3.5# channel	<b>FINISH</b> Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
<b>SIDE RAILS</b> 3" X 5" Angle w/ Stake Pockets & Rubrail on Both Sides, Front & Rear	

### STANDARD FEATURES

- Two 5200# Cambered Axles w/ 2 Electric Brakes
- Jack Bolted On For Easy Replacement
- Floor Secured w/ 5/16" Torx Screws
- Complete Break-A-Way System w/ Charger
- Safety Chains Attached w/ Cold Rolled Eyelets
- Rub Rail w/ Stake Pockets
- Adjustable Coupler In Channel
- Rubber Mounted, Sealed Lighting
- Reflective Marker Tape

#### 100A-16

LENGTH	DIMENSIONS		
	A	B	C
14'	169-1/2"	66-1/2"	103"
16'	193-1/2"	78-1/2"	115"
18'	217-1/2"	90-1/2"	127"
20'	240"	102"	138"

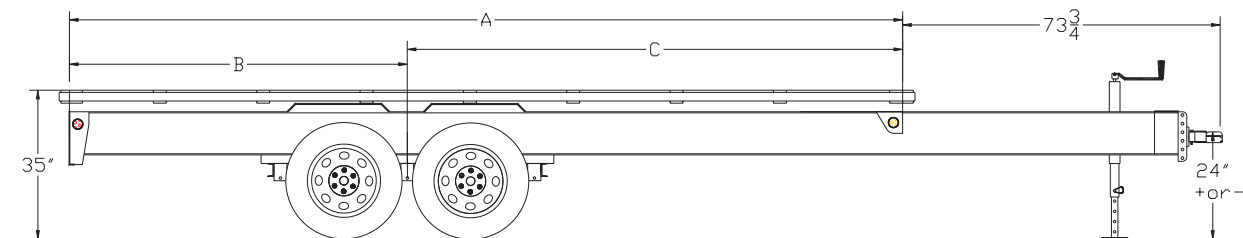

### OPTIONS

<b>NBK2</b>	<b>Electric Brakes On 1 Axle Only</b>
<b>HYD1</b>	<b>Hydraulic Brakes On 1 Axle w/ Adjustable Demco Actuator</b>
<b>HYD2</b>	<b>Hydraulic Brakes On 2 Axles w/ Adjustable Demco Actuator</b>
<b>SP</b>	<b>15" Spare Tire &amp; Wheel - Load Range D</b>
<b>TU</b>	<b>Tire Upgrade to 16" - Load Range E</b>
<b>SPU</b>	<b>Spare Tire Upgrade to 16" - Load Range E</b>
<b>SF</b>	<b>1/8" Diamond Plate Steel Floor (Per Sq. Ft.)</b>
<b>HDLJ</b>	<b>10K Heavy Duty Drop Leg Jack - Top Wind</b>
<b>AP</b>	<b>Adjustable Pintle In Channel</b>

Effective January 1, 2003 (Specifications and Options subject to change without notice.)