

# 12GP

## HEAVY DUTY GOOSENECK TANDEM AXLE TRAILER


<b>G.V.W.R.</b>	12,000#	<b>AXLES</b>	Two 6000# Cambered Axles w/ Elec. Brakes
<b>G.A.W.R. (EA. AXLE)</b>	5,560#	<b>SUSPENSION</b>	Multi-Leaf Slipper Spring with Equalizer
<b>COUPLER</b>	2-5/16" Ball Adjustable Pipe	<b>TIRE</b>	7.50 X 16" Load Range E
<b>SAFETY CHAINS</b>	3/8" Grd. 70 w/ Safety Latch Hook (2 ea.)	<b>WHEEL</b>	16 X 6 White Spoke 8 Bolt
<b>JACK</b>	10,000# Dropleg Jack	<b>FLOOR</b>	2" Pine
<b>NECK</b>	8" Channel	<b>LIGHTS</b>	D.O.T. Stop, Tail, Turn and Clearance
<b>TOP RAIL</b>	2-7/8" Pipe Square Back	<b>ELEC. PLUG</b>	6 Way
<b>FRAME</b>	3" X 5" X 1/4" Angle	<b>FINISH (PREP)</b>	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
<b>CROSSMEMBERS</b>	2" X 3" X 3/16" Angle	<b>FINISH</b>	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
<b>UPRIGHTS</b>	2" X 3" X 3/16" X 16"		
<b>FENDERS</b>	9" X 72" Double Broke Diamond Plate w/ Back		

### STANDARD FEATURES

- Two 6000# Axles w/ 2 Electric Brakes
- Spare Tire Mount
- 4' Slide In Ramps
- 3" Sq. Tube Top Rail on 22' and longer
- 2-7/8" Top Rail Capped w/ Self Sealing Plugs on 20' and shorter
- Complete Break-A-Way System w/ Charger
- Gooseneck w/ 2-5/16" Adjustable Coupler
- Safety Chains Attached w/ Cold Rolled Eyelets
- Floor Secured w/ 5/16" Torx Screws
- Tie Down Pockets - Sides, Front & Rear
- Reflective Marker Tape

12GP-20

DIMENSIONS			
LENGTH	A	B	C
18'	217-1/2"	72-1/2"	145"
20'	240"	80"	160"
22'	264"	88"	176"
24'	288"	96"	192"

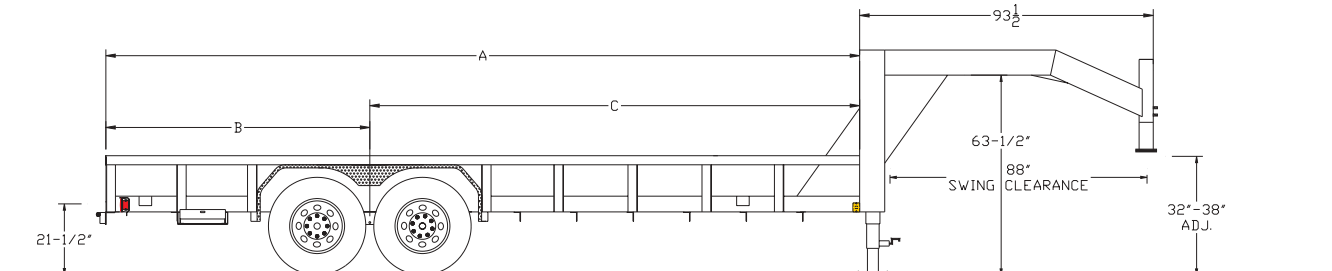

### OPTIONS

<b>NBK2</b>	Electric Brakes On 1 Axle Only
<b>SP</b>	16" Spare Tire & Wheel - Load Range E
<b>SF</b>	1/8" Diamond Plate Steel Floor (Per Sq. Ft.)
<b>RG</b>	Rampgate in Lieu of Ramps
<b>FUR5</b>	5' Fold-Up Ramps in Lieu of 4' Slide In Ramps
<b>HST</b>	Higher Sides (Each Additional Foot)
<b>ENEX</b>	Enclosed w/ Expanded Metal (Per Sq. Ft.)
<b>ENSH</b>	Enclosed w/ Sheet Metal (Per Sq. Ft.)

Effective January 1, 2003 (Specifications and Options subject to change without notice.)