

14GN TANDEM AXLE GOOSENECK


G.V.W.R.	14,000#	AXLES	Two 7000# Cambered Axles w/ Elec. Brakes
G.A.W.R. (EA. AXLE)	6,084#	SUSPENSION	Multi-Leaf Slipper Spring w/ Equalizer
COUPLER	2-5/16" Ball Adjustable Pipe	TIRE	LT235/85R16 Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 ea.)	WHEEL	6.00 X 16" HD White Modular – 8 Bolt
JACK	10,000# Drop Leg Jack (Bolted On)	FLOOR	2" Pine
NECK	10" Channel	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(none)	ELEC. PLUG	6 Way
FRAME	12" – 16# I-Beam	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	3" Channel	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
SIDE RAILS	6" Channel w/ Rub Rail and Stake Pockets on 24" Centers		

STANDARD FEATURES

- Complete Break-A-Way System w/ Battery & Charger
- Rubber Mounted Sealed Lighting
- (2) Side Bed Steps
- Spare Tire Mount
- 3/8" Heavy Duty Rub Rail
- 102" Overall Width
- Chain Basket between the gooseneck uprights
- Modular Sealed Wiring Harness
- Safety Reflective Marker Tape
- Bolt On Jack w/ Greasable Handle
- Radial Tires on HD Wheels
- Floor Secured w/ 5/16" Torx Screws

14GN-20

LENGTH	DIMENSIONS- STRAIGHT DECK			DIMENSIONS- WITH DOVETAIL		
	A	B	C	D	B	E
20'	240"	160"	80"	300"	196"	104"
22'	264"	176"	88"	324"	216"	108"
24'	288"	192"	96"	348"	232"	116"
26'	312"	208"	104"	372"	248"	124"
28'	336"	224"	112"	396"	264"	132"

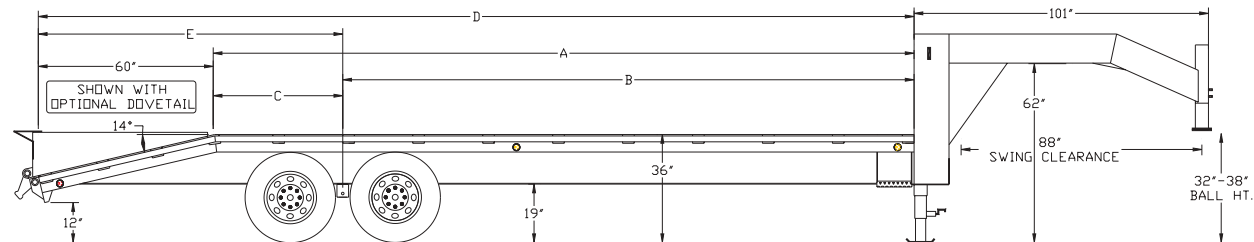

OPTIONS

DT	5' Dovetail w/ Double Hinged Ramps (Added to Existing Length)
CPDT	5' Center Pop-Up Dovetail w/ 5' Fold-up Ramps
TOR	Torsion Axles
JTP	Square Adjustable Screw Type Coupler
DDLJ	Dual Drop Leg Jacks (Single Speed)
2SPJ	Single Two Speed Jack (25K)
D2SPJ	Dual Two Speed Landing Gear Jacks (150K)
DON	Deck On The Neck (6')
SP	16" Spare Tire & Wheel – Load Range E
SPU	16" Spare Tire & Wheel – Load Range G
TU	Tire Upgrade to LT235/85R16 LR "G"
LPTB	Low Profile Tool Box 12" X 18" X 36" (Side Mount)
TB	Tool Box 18" X 18" X 36" (Side Mount)