

14GP TANDEM AXLE GOOSENECK


G.V.W.R.	14,000#	AXLES	Two 7000# Cambered Axles w/ Elec. Brakes
G.A.W.R. (EA. AXLE)	6,084#	SUSPENSION	Multi-Leaf Slipper Spring w/ Equalizer
COUPLER	2-5/16" Ball Adjustable Pipe	TIRE	LT235/85R16 Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/ Safety Latch Hook (2 ea.)	WHEEL	16 X 6 HD White Modular 8 Bolt
JACK	10,000# Drop Leg Jack	FLOOR	2" Pine
NECK	8" Channel	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	3" Square Tubing	ELEC. PLUG	6 Way
FRAME	3" X 5" X 5/16" Angle	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	3" Channel	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
UPRIGHTS	16" Tall 2" X 3" X 3/16" Angle		
FENDERS	9" X 72" Dbl. Broke Diamond Plate w/Back		

STANDARD FEATURES

- Two 7,000# Axles w/ 2 Electric Brakes
- Complete Break-A-Way System w/ Charger
- Floor Secured w/ 5/16" Torx Screws
- Tie Down Pockets - Sides, Front & Rear
- 4' Slide In Ramps
- 3" Sq. Tube Top Rail
- Reflective Marker Tape
- Spare Mount
- Safety Chains Attached w/ Cold Rolled Eyelets
- Gooseneck w/ 2-5/16" Adjustable Pipe Coupler

14GP-20

DIMENSIONS			
LENGTH	A	B	C
18'	217-1/2"	72-1/2"	145"
20'	240"	80"	160"
22'	264"	88"	176"
24'	288"	96"	192"
26'	312"	104"	208"

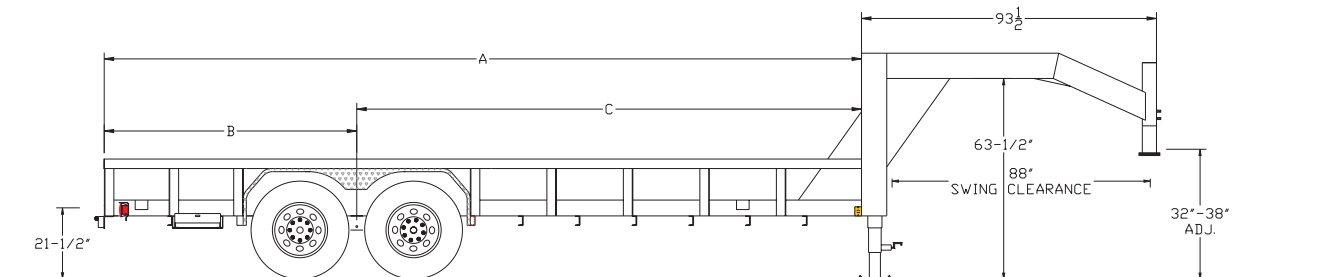

OPTIONS

SP	16" Spare Tire & Wheel - Load Range E
SF	1/8" Diamond Plate Steel Floor (Per Sq. Ft.)
RG	Rampgate in Lieu of Ramps
FUR5	5' Fold Up Ramps in Lieu of 4' Slide in Ramps
HST	Higher Sides (Ea. Additional Foot)
ENEX	Enclosed w/ Expanded Metal (Per Sq. Ft.)
ENSH	Enclosed w/ Sheet Metal (Per Sq. Ft.)
TU	16" Tire upgrade to Load Range G
SPU	16' Spare Tire & Wheel - Load Range G

Effective January 1, 2003 (Specifications and Options subject to change without notice.)