

# 20GN / 20PH

## TANDEM DUAL AXLE GOOSENECK/PINTLE


<b>G.V.W.R.</b> 20,000#	<b>AXLES</b> Two 10,000# Dual Wheel Electric Brake Axles
<b>G.A.W.R. (EA. AXLE)</b> 9,760#	<b>SUSPENSION</b> Multi-Leaf Slipper Spring w/ Equalizer
<b>COUPLER</b> 2-5/16" Ball Adjustable Pipe or Pintle	<b>TIRE</b> 750 X 16 Load Range E
<b>SAFETY CHAINS</b> 3/8" Grd. 70 w/ Safety Latch Hook (2 ea.)	<b>WHEEL</b> 16 X 6 Dual 8 Bolt
<b>JACK</b> 10,000# Drop Leg Jack (Bolted On)	<b>FLOOR</b> 2" Pine
<b>NECK</b> 10" Channel (If Applicable)	<b>LIGHTS</b> D.O.T. Stop, Tail, Turn and Clearance
<b>TOP RAIL</b> (none)	<b>ELEC. PLUG</b> 6 Way
<b>FRAME</b> 12" - 16# I-Beam	<b>FINISH (PREP)</b> Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
<b>CROSSMEMBERS</b> 3" Channel	<b>FINISH</b> Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
<b>SIDE RAILS</b> 6" Channel w/ Rub Rail and Stake Pockets on 24" Centers	

### STANDARD FEATURES

- Complete Break-A-Way System w/ Battery & Charger
- Rubber Mounted Sealed Lighting
- 102" Overall Width
- Dovetail w/ Double Hinged Fold-Up Ramps
- 3/8" Heavy Duty Rub Rail
- Safety Reflective Marker Tape
- Bolt On Jack w/ Greasable Handle
- Two 10,000# Oil Bath Axles


DIMENSIONS- WITH DOVETAIL			
LENGTH	A	B	C
20'	300"	196"	104"
24'	348"	232"	116"

20GN-20+ 5

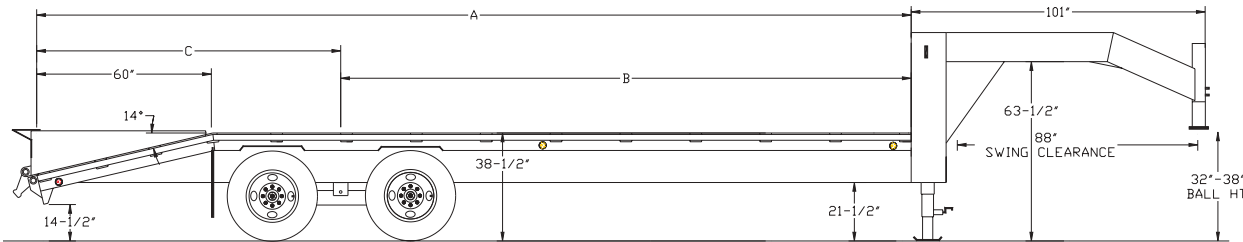

20PH-20+ 5

DIMENSIONS- WITH DOVETAIL			
LENGTH	A	B	C
20'	300"	196"	104"
24'	348"	232"	116"

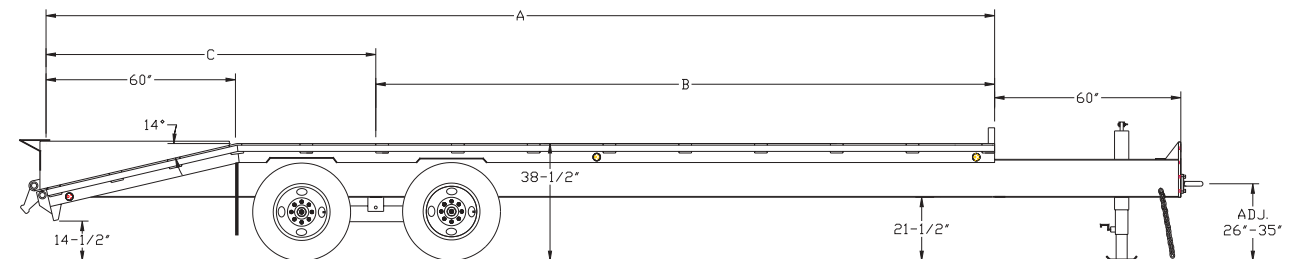

### OPTIONS

<b>SP</b>	Standard Spare Tire & Wheel - Load Range - E & Spare Mount
<b>TU</b>	Tire Upgrade to LT235/85R16 Load Range E Radials
<b>SPU</b>	Spare Upgrade to LT235/85R16 Load Range E Radial

Effective January 1, 2003 (Specifications and Options subject to change without notice.)