

22GN/22PH

TANDEM DUAL AXLE GOOSENECK/PINTLE


| | | | |
|----------------------------|--------------------------------------------------------|----------------------|----------------------------------------------------------------------------------------------|
| G.V.W.R. | 22,500# | AXLES | Two 10,000# Dual Wheel Electric Brake Axles (Oil Bath) |
| G.A.W.R. (EA. AXLE) | 10,000# | SUSPENSION | Multi-Leaf Slipper Spring with Equalizer |
| COUPLER | 2-5/16" Ball Adj. Square Crank Type | TIRE | LT235/85R16 Load Range E |
| SAFETY CHAINS | 3/8" Grd. 70 w/Safety Latch Hook (2 ea.) | WHEEL | 16 X 6 Dual 8 Bolt |
| JACKS | Two 10,000# Drop Leg Jacks (Bolted On) | FLOOR | 2" Pine |
| NECK | 10" Channel | LIGHTS | D.O.T. Stop, Tail, Turn and Clearance |
| TOP RAIL | (none) | ELEC. PLUG | 6 Way |
| FRAME | 12"- 16# I-Beam w/Bridge Truss | FINISH (PREP) | Acid Etched w/White Phosphorus, Under-coated w/Panther 813 & Two Coats Primer |
| CROSSMEMBERS | 3" Channel | FINISH | Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped |
| SIDE RAILS | 6" Channel w/Rub Rail and Stake Pockets on 24" Centers | | |

STANDARD FEATURES

- Complete Break-A-Way System w/ Battery & Charger
- Rubber Mounted Sealed Lighting
- Spare Tire Mount
- (2) Side Bed Steps
- Two Bolt On Jacks w/ Greasable Handle
- 102" Overall Width
- 30' Length or Longer Includes Anti-Twist Frame Option
- Safety Reflective Marker Tape
- Two 10,000# Oil Bath Axles
- Radial Tires
- Modular Sealed Wiring Harness
- Formed Crossmember to Frame Gussets
- Chain Basket Between Gooseneck Uprights

| DIMENSIONS- STRAIGHT DECK | | | | DIMENSIONS- WITH DOVETAIL | | |
|---------------------------|------|------|------|---------------------------|------|------|
| LENGTH | A | B | C | D | B | E |
| 20' | 240" | 160" | 80" | 300" | 196" | 104" |
| 22' | 264" | 176" | 88" | 324" | 216" | 108" |
| 24' | 288" | 192" | 96" | 348" | 232" | 116" |
| 26' | 312" | 208" | 104" | 372" | 248" | 124" |
| 28' | 336" | 224" | 112" | 396" | 264" | 132" |
| 30' | 360" | 240" | 120" | 420" | 280" | 140" |
| 32' | 384" | 256" | 128" | 444" | 296" | 148" |
| 34' | 408" | 272" | 136" | 468" | 312" | 156" |
| 36' | 432" | 288" | 144" | 492" | 328" | 164" |
| 40' | 480" | 320" | 160" | 540" | 360" | 180" |

22GN-20

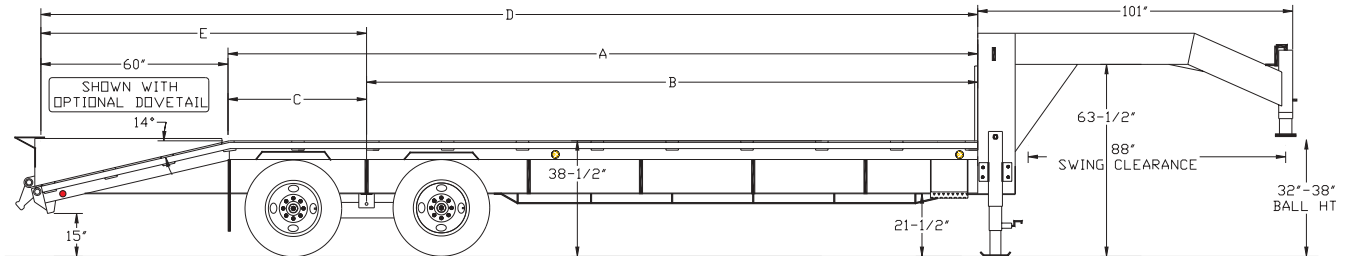

OPTIONS

| | |
|--------------|------------------------------------------------------|
| DT | 5' Dovetail with Double Hinged Ramps (Spring Assist) |
| CPDT | 5' Center Pop-Up Dovetail w/ 5' Fold-up Ramps |
| D2SPJ | Dual, Two Speed, Landing Gear Jacks (150K) |
| DON | Deck on the Neck (6') |
| VAC | Vacuum Over Hydraulic Drum Brakes |
| SP | 16" Spare Tire & Wheel - Load Range - E |
| LPTB | Low Profile Tool Box 12" X 18" X 36" (Side Mount) |
| LPRO | Low Profile Deck Height |
| TB | Tool Box 18" X 16" X 36" (Side Mount) |

Effective January 1, 2003 (Specifications and Options subject to change without notice.)