

60CH

CAR HAULER SPECIAL TANDEM AXLE TRAILER


G.V.W.R.	6,000#	AXLES	Two 3500# Cambered Axles w/ 1 Elec. Brake
G.A.W.R. (EA. AXLE)	2,960#	SUSPENSION	Multi-Leaf Spring w/ Equalizer
COUPLER	2" A-Frame	TIRE	ST205/75-15 Load Range B
SAFETY CHAINS	1/4" Grd. 70 w/ Safety Latch Hook	WHEEL	15 X 16 White Spoke 5 Bolt
JACK	2000# Top Wind (Bolted On)	FLOOR	2" Pine
TONGUE	4" Channel Tongue	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(None)	ELEC. PLUG	6 Way
FRAME	3" X 5" X 1/4" Angle	FINISH (PREP)	Acid Etched w/White Phosphorus, & Two Coats Primer
CROSSMEMBERS	2" X 3" X 3/16" Angle	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
UPRIGHTS	(None)		
FENDERS	9" X 72" Rolled Formed w/ Back		

STANDARD FEATURES

- Tie Down Pockets Sides & Front
- Lower Jack Support Plate
- 4' Slide In Ramps
- Two 3500# Axles w/ 1 Electric Brake
- Complete Break-A-Way System w/ Charger
- Safety Chains Attached w/ Cold Rolled Eyelets
- Floor Secured w/ 5/16" Torx Screws

60CH-16

DIMENSIONS			
LENGTH	A	B	C
14'	169-1/2"	66-1/2"	103"
16'	193-1/2"	78-1/2"	115"

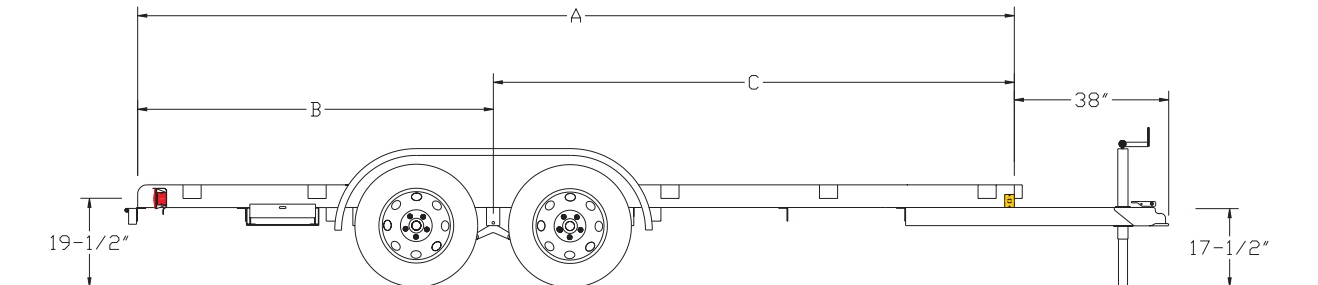

OPTIONS

NBK1	No Electric Brakes (Farm or Off Road Use Only)
BRK2	Electric Brakes On Two Axles
BD2	2" Bulldog Coupler
BD2.5.16	2-5/16" Bulldog Coupler
SP	15" Spare Tire & Wheel — Load Range B

Effective January 1, 2003 (Specifications and Options subject to change without notice.)