

70CH


CAR HAULER TANDEM AXLE TRAILER

G.V.W.R.	7,000#	AXLES	Two 3500# Cambered Axles w/ 1 Elec. Brake
G.A.W.R. (EA. AXLE)	3,500#	SUSPENSION	Multi-Leaf Spring w/ Equalizer
COUPLER	7K 2" Bulldog Coupler	TIRE	ST225/75-15 Load Range C
SAFETY CHAINS	¼" Grd. 70 w/ Safety Latch Hook	WHEEL	15 X 6 White Spoke 5 Bolt
JACK	2000# Top Wind (Bolted On)	FLOOR	2" Pine
TONGUE	4" Channel Tongue Fold Back	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(None)	ELEC. PLUG	6 Way
FRAME	3" X 5" X 5/16" Angle	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	2" X 3" X 3/16" Angle	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
UPRIGHTS	(None)		
FENDERS	9" X 72" Teardrop w/ Back		

STANDARD FEATURES

- Lower Jack Support Plate
- Two 3500# Axles w/ 1 Electric Brake
- Complete Break-A-Way System w/ Charger
- 4' Slide In Ramps
- Set Back Jack
- Front Stop Rail
- Fold Back Tongue
- Tear Drop Fenders
- Tie Down Pockets Sides & Front
- Floor Secured w/ 5/16" Torx Screws
- Safety Chains Attached w/ Cold Rolled Eyelets

70CH-16

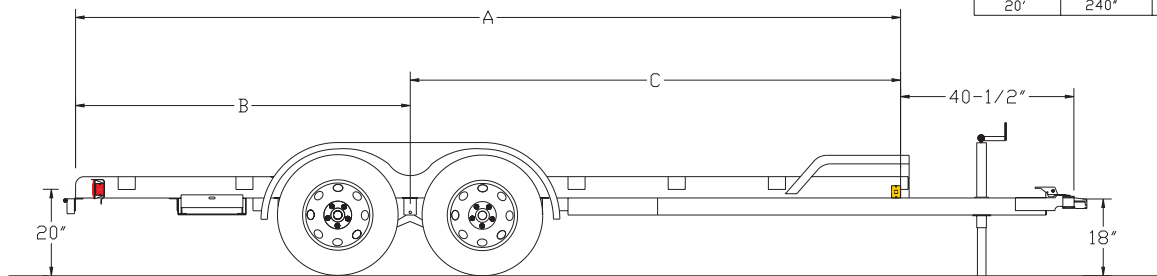

DIMENSIONS			
LENGTH	A	B	C
12'	145-1/2"	60-1/2"	85"
14'	169-1/2"	66-1/2"	103"
16'	193-1/2"	78-1/2"	115"
18'	217-1/2"	90-1/2"	127"
20'	240"	102"	138"

OPTIONS

BRK2	Electric Brakes On Two Axles
HYD1	Hydraulic Brakes On 1 Axle w/ Toledo Actuator
HYD2	Hydraulic Brakes On 2 Axles w/ Toledo Actuator
SPMT	Spare Mount (Side)
SP	15" Spare Tire & Wheel – Load Range C
BD2.5.16	2-5/16" Bulldog Coupler
FUJ	2K Fold-Up Jack
SF	1/8" Diamond Plate Steel Floor (Per Sq. Ft.)
DAX	Drop Axles (Includes Both)
DLJ	7K Drop-Leg Jack
CRF	Car Hauler Raised Floor
RSR	4' Rear Slide Out Ramps
DT	Dovetail in Existing Length

Effective January 1, 2003 (Specifications and Options subject to change without notice.)